

Multistar (≤65 HRC)

Multi Fluted End Mills - Regular Series
Multi Fluted End Mills - Long Flute Series

Multi Fluted End Mills - Regular Series

Article No.	Dimension (mm)					SI-coated
	6 Flutes	Ø d1 h10	Ø d2 h6	L2	L1	
Y6-SMF 6060		6.0	6	16	50	■
Y8-SMF 6080		8.0	8	20	60	■
Y10-SMF 6100		10.0	10	25	75	■
Y12-SMF 6120		12.0	12	30	75	■
Y16-SMF 6160		16.0	16	40	100	■
Y20-SMF 6200		20.0	20	45	100	■

Multi Fluted End Mills - Long Flute Series

Article No.	Dimension (mm)					SI-coated
	6 Flutes	Ø d1 h10	Ø d2 h6	L2	L1	
Y6-SMF 6060 LF		6.0	6	24	75	■
Y8-SMF 6080 LF		8.0	8	30	75	■
Y10-SMF 6100 LF		10.0	10	40	100	■
Y12-SMF 6120 LF		12.0	12	45	100	■
Y16-SMF 6160 LF		16.0	16	64	150	■
Y20-SMF 6200 LF		20.0	20	72	150	■


■ Available EX stock / subject to prior sale
□ Only Available against orders with **MOQ 20** Nos.
UMG - Ultra Micron Grade



Steel	R _m < 850	■
	R _m 850-1300	■
	R _m 1300-1500	■
M	Stainless Steel	■
K	Cast Iron	□
N	Copper	□
S	Titanium	■
Hardened Steel	HRC 48-55	□
	HRC 56-60	■
	HRC < 65	■

Y
65
Series

 Regular Series LF SERIES
 **SI** COATING
 λ 45°
 **UMG** 0.2µm

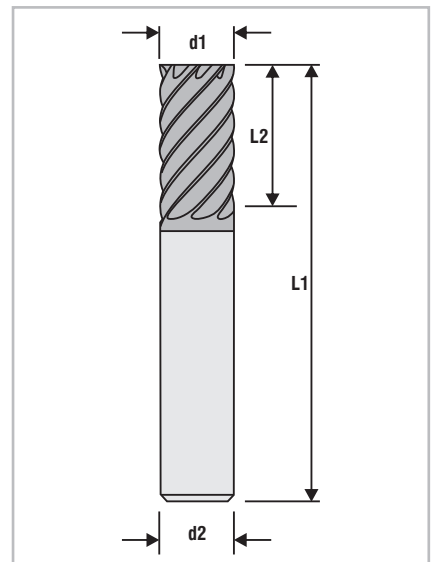

FLAT
End Mills

Tolerance

Diameter	Range
8 ≤ d < 18	0 / -0.03
20 ≤ d	0 / -0.04